

auta



AUTÓNOMO
STANDALONE

RED
NETWORK



REF: 721164

ES PULSADOR SENSITIVO BK

EN SENSITIVE BK PUSH-BUTTON

auta

Bringing people together

Especificaciones Features


Voltaje de entrada: 12-24V CC; 15-24V CA
Consumo de corriente: max.65mA
Salida: Relé (2A; 24V DC / 120V AC)
Iluminación (LED): Normal - ROJO
 Operativo - VERDE
Temperatura de uso: -20°C hasta +50°C
Humedad: No condensado hasta 95%
Dimensiones (mm): 92L x 51L x 25A (Metal)
 92L x 51L x 27A (ABS)
Carcasa: Aluminio moldeado o ABS(negro)
Tapa frontal: Acero suave pintado
Protección: IP65

ES



Input voltage: 12-24 VDC; 15-24 VAC;
Current consumption: max.65mA
Relay Output: 2A at 24V DC / 120V AC
Indicators-LED: Normal - RED
 Relay Operation - GREEN
Operating Temperature: -20° to 50°C
Operating Humidity: Non-condensing up to 95%
Dimension (mm): 92L x 51W x 25H (Metal)
 92L x 51W x 27H (ABS)
Housing: Die-cast Aluminium alloy or ABS
Touch Plate: Mild Steel Painted
Protection: IP65

EN

Montaje Mounting

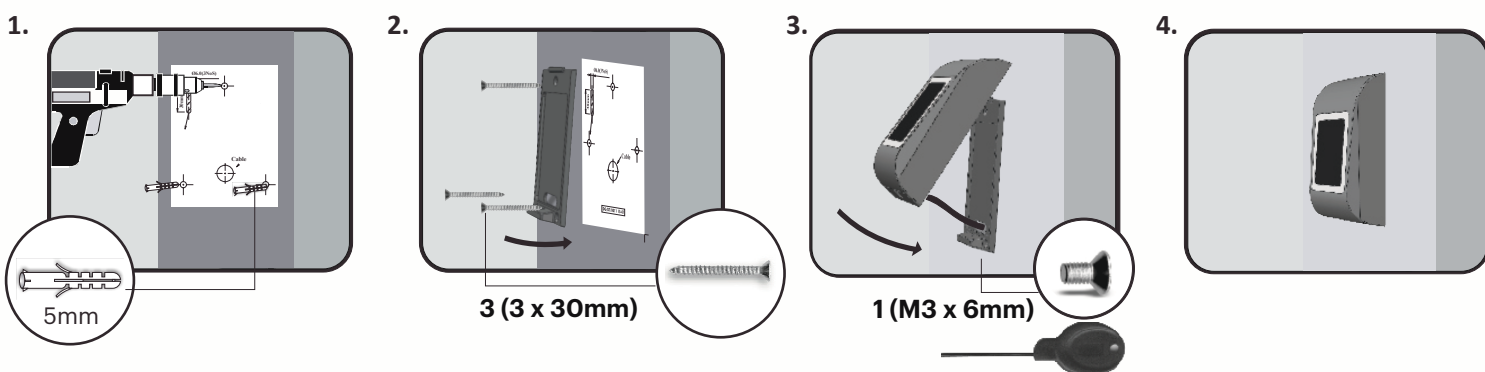

Cableado Wiring

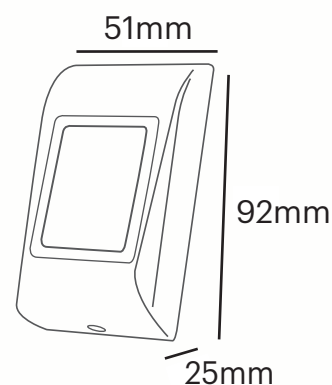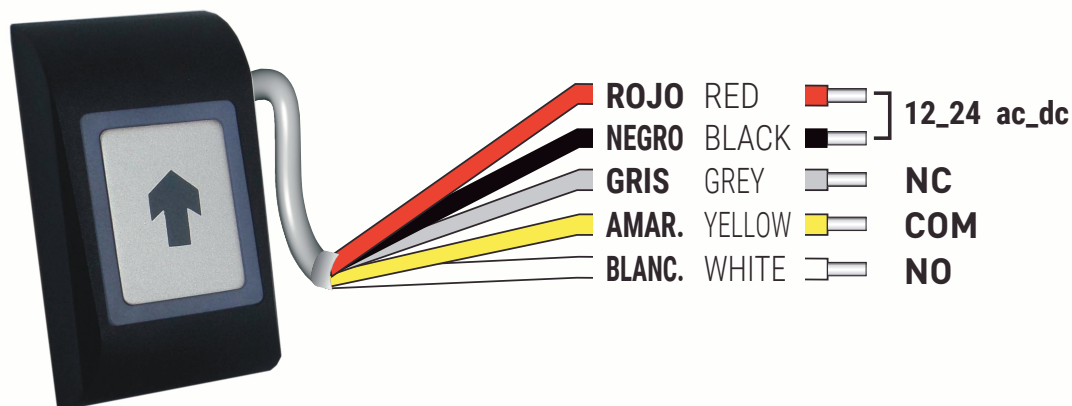

Funcionamiento Functioning

	Switch 1	Switch 2	DipSwitch
Mod. ON_OFF	ON	ON	
10s	ON	OFF	
5s	OFF	ON	
3s	OFF	OFF	



Iluminación ON
Backlight ON



Iluminación OFF
Backlight OFF